


ELITE With laminate covering

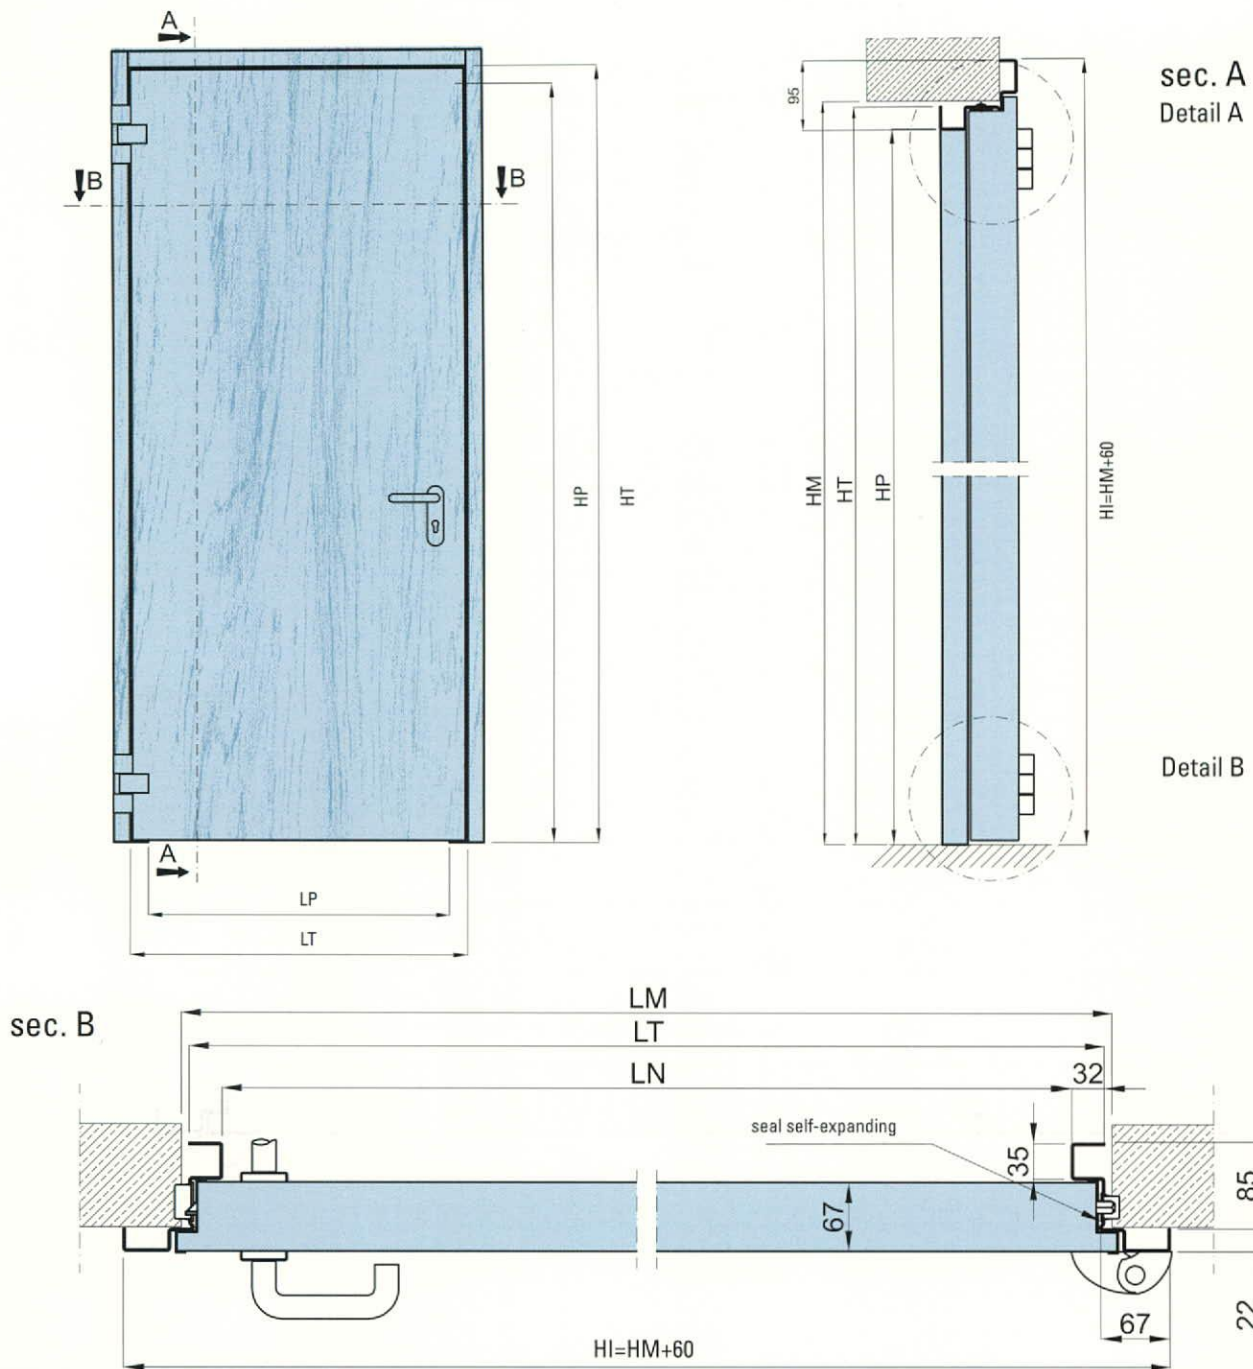

Blind leaf door with laminate covering, constituted by:

- Frame in galvanized steel, thickness mm. 15/10 "Z" profiled, conformed to allow coplanarity of leaf-frame, with room for insertion of intumescent strip, prearranged with steel strips for mounting on wall angles or holes for fixing on concrete.
- The connection between frame and corners occur through an unique system of joint, that first of all ensure excellent rigidity, than it avoid usual corrosion of welding
- Leaf composed by double layer galvanized steel mm. 9/ 10, press-formed and welded, and laminate covering with finishing as indicated in laminate covering list, finishing perimeter profile.
- Frame and finishing profile with powder colour RAL 8019.
- High density insulating package inside the leaf.
- Nr. 2 hinges each leaf, made in sinterized steel, with sliding on two steel roller bearings, oversized for intensive usage in condition of heavy loads. Their construction allows the adjusting of the leaf

position in every moment by means of special screws, normally hidden by plastic cups.

- Fixed rostrum placed between the hinges.
- Fireproof lock type "Patent" with cylinder and three keys.
- Fire proof lock type « Flush bolt » on secondary leaf .
- Black arm closing selector (Metal door excluded).
- PVC black handle with inside steel armour, "U" shaped for accidental grips.

NOTE:

- Consider only special size doors.
- No window glazing inside.
- In accordance to UNI EN 1634, the laminate covering can be applied on REI 60 and REI 120 doors